



No. OF POSITION	A	B	C	D	E	F	G
10	6.55	4.90	3.20	12.82	7.80	10.00	13.00
20	10.55	8.90	7.20	16.82	11.80	14.00	17.00
30	14.55	12.90	11.20	20.82	15.80	18.00	21.00
40	18.55	16.90	15.20	24.82	19.80	22.00	25.00
50	22.55	20.90	19.20	28.82	23.80	26.00	29.00
60	26.55	24.90	23.20	32.82	27.80	30.00	33.00
70	30.55	28.90	27.20	36.82	31.80	34.00	37.00
80	34.55	32.90	31.20	40.82	35.80	38.00	41.00
90	38.55	36.90	35.20	44.82	39.80	42.00	45.00
100	42.55	40.90	39.20	48.82	43.80	46.00	49.00

Notes:

- Housing material: PA-9T (UL94V-0).
- CAP material: PA-6T (UL94V-0).
- Terminal material: phosphor bronze.  
The overall 60u"~200u" Nickel Plated (lead-free).  
Welding pin gold plated 2u"~8u" MIN.  
contact point gold plated 4u" MIN. (Pb free).
- Fitting nail material: brass.  
The overall 50u"~100u" Nickel Plated (lead-free).  
Plated with matte Tin(100%) 80u"~150u" (lead-free).
- "▲" Important dimensions.
- PART NO. Specifications: 123006-20XX50

Number of positions

RECOMMENDED PCB LAYOUT  
GENERAL TOLERANCE: ±0.05  
(MOUNTING SIDE)

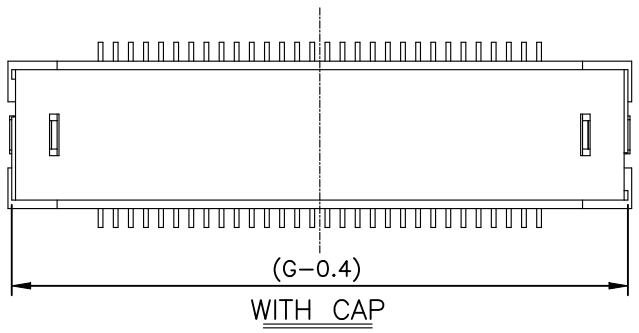

				UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		客户图 Drawings		北极大电子科技有限公司 BEIJIDA ELECTRONICS TECHNOLOGY CO. LIMITED					
				X.		APPROVED		DATE		COMPUTER NO			
				X.X	±0.20	陈天舒		2017-12-19		123006-20XX50			
				X.XX	±0.10	CHECKED		DATE		NAME			
				X.XXX		陈天舒		2017-12-19		BTB0.8-5 SERIES Floating REC ASSY			
				ANG.	±0'30'	DRAWN		DATE		SIZE	SCALE	REV	
				Revision of plating specification	Lu	2020-05-20	张运兴		2017-12-19		A4	2.5:1	B
				Release of drawing	ZHANG	2017-12-19							
SER	REVISIONS			CHK	DATE								