
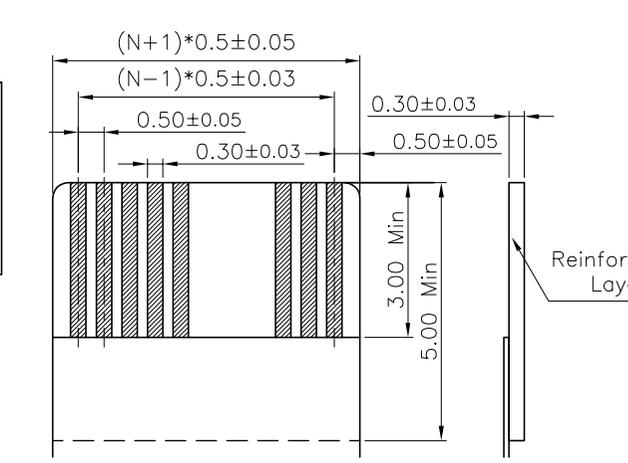


NOTES:
 1.MATERIAL:
 HOUSING:LCP(UL94V-0)
 ACTUATOR:PA-9T(UL94V-0)
 TERMINAL:PHOSPHOR BRONZE MATTE TIN PLATED
 FITTING NAIL:BRASS MATTE TIN PLATED
 2."▼"IMPORTANT DIMENSION
 3.PART NO. SPECIFICATION:101047-XOXXXO
 4.出货时后盖须处于打开状态


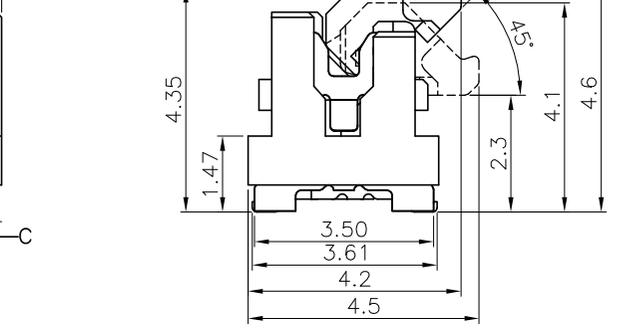


RECOMMENDED FFC/FPC DIMENSION

NO. OF PIN	DIMENSION					
	A	B	C	D	E	F
4	4.42	3.24	2.55	4.77	1.50	4.14
5	4.92	3.74	3.05	5.27	2.00	4.64
6	5.42	4.24	3.55	5.77	2.50	5.14
7	5.92	4.74	4.05	6.27	3.00	5.64
8	6.42	5.24	4.55	6.77	3.50	6.14
9	6.92	5.74	5.05	7.27	4.00	6.64
10	7.42	6.24	5.55	7.77	4.50	7.14
11	7.92	6.74	6.05	8.27	5.00	7.64
12	8.42	7.24	6.55	8.77	5.50	8.14
13	8.92	7.74	7.05	9.27	6.00	8.64
14	9.42	8.24	7.55	9.77	6.50	9.14
15	9.92	8.74	8.05	10.27	7.00	9.64
16	10.42	9.24	8.55	10.77	7.50	10.14
17	10.92	9.74	9.05	11.27	8.00	10.64
18	11.42	10.24	9.55	11.77	8.50	11.14
19	11.92	10.74	10.05	12.27	9.00	11.64
20	12.42	11.24	10.55	12.77	9.50	12.14
21	12.92	11.74	11.05	13.27	10.00	12.64
22	13.42	12.24	11.55	13.77	10.50	13.14
23	13.92	12.74	12.05	14.27	11.00	13.64
24	14.42	13.24	12.55	14.77	11.50	14.14
25	14.92	13.74	13.05	15.27	12.00	14.64
26	15.42	14.24	13.55	15.77	12.50	15.14
27	15.92	14.74	14.05	16.27	13.00	15.64
28	16.42	15.24	14.55	16.77	13.50	16.14
29	16.92	15.74	15.05	17.27	14.00	16.64
30	17.42	16.24	15.55	17.77	14.50	17.14
31	17.92	16.74	16.05	18.27	15.00	17.64
32	18.42	17.24	16.55	18.77	15.50	18.14
33	18.92	17.74	17.05	19.27	16.00	18.64
34	19.42	18.24	17.55	19.77	16.50	19.14
35	19.92	18.74	18.05	20.27	17.00	19.64
36	20.42	19.24	18.55	20.77	17.50	20.14
37	20.92	19.74	19.05	21.27	18.00	20.64
38	21.42	20.24	19.55	21.77	18.50	21.14
39	21.92	20.74	20.05	22.27	19.00	21.64
40	22.42	21.24	20.55	22.77	19.50	22.14
41	22.92	21.74	21.05	23.27	20.00	22.64
42	23.42	22.24	21.55	23.77	20.50	23.14
43	23.92	22.74	22.05	24.27	21.00	23.64
44	24.42	23.24	22.55	24.77	21.50	24.14
45	24.92	23.74	23.05	25.27	22.00	24.64
46	25.42	24.24	23.55	25.77	22.50	25.14
47	25.92	24.74	24.05	26.27	23.00	25.64
48	26.42	25.24	24.55	26.77	23.50	26.14
49	26.92	25.74	25.05	27.27	24.00	26.64
50	27.42	26.24	25.55	27.77	24.50	27.14
51	27.92	26.74	26.05	28.27	25.00	27.64
52	28.42	27.24	26.55	28.77	25.50	28.14
53	28.92	27.74	27.05	29.27	26.00	28.64
54	29.42	28.24	27.55	29.77	26.50	29.14
55	29.92	28.74	28.05	30.27	27.00	29.64
56	30.42	29.24	28.55	30.77	27.50	30.14
57	30.92	29.74	29.05	31.27	28.00	30.64
58	31.42	30.24	29.55	31.77	28.50	31.14
59	31.92	30.74	30.05	32.27	29.00	31.64
60	32.42	31.24	30.55	32.77	29.50	32.14



				UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	客户图 Drawings			北极大电子科技有限公司 BEIJIDA ELECTRONICS TECHNOLOGY CO. LIMITED		
				X.	APPROVED			DATE		
				X.X ±0.20	DATE			COMPUTER NO		
				X.XX ±0.10	NAME			101047-XOXXXO		
				X.XXX	DRAWN			FPC0.5-17代立贴掀盖式成品		
				ANG. ±0°30'	张天舒			2015-05-22		
				修改B项尺寸	张运兴			2015-07-23		
				REVISIONS	CHK			DATE		
				UNIT	MM			SCALE		
				张运兴	张运兴			7:1		
				REV	B			REV		

NO of Pin	A0	B0	K0	F	W	quantity per reel
4		5.10		6.25	16	1500PCS /volume
5		5.60		6.25	16	
6		6.10		6.25	16	
7		6.60		6.25	16	
8		7.10		10.25	24	
9		7.60		10.25	24	
10		8.10		10.25	24	
11		8.60		10.25	24	
12		9.10		10.25	24	
13		9.60		10.25	24	
14		10.10		10.25	24	
15		10.60		10.25	24	
16		11.10		10.25	24	
17		11.60		10.25	24	
18		12.10		10.25	24	
19		12.60		10.25	24	
20		13.10		10.25	24	
21		13.60		14.25	32	
22		14.10		14.25	32	
23		14.60		14.25	32	
24		15.10		14.25	32	
25		15.60		14.25	32	
26		16.10		14.25	32	
27		16.60		14.25	32	
28		17.10		14.25	32	
29		17.60		14.25	32	
30		18.10		14.25	32	
31		18.60		14.25	32	
32	4.30	19.10	4.80	14.25	32	
33		19.60		14.25	32	
34		20.10		14.25	32	
35		20.60		20.25	44	
36		21.10		20.25	44	
37		21.60		20.25	44	
38		22.10		20.25	44	
39		22.60		20.25	44	
40		23.10		20.25	44	
41		23.60		20.25	44	
42		24.10		20.25	44	
43		24.60		20.25	44	
44		25.10		20.25	44	
45		25.60		20.25	44	
46		26.10		20.25	44	
47		26.60		20.25	44	
48		27.10		20.25	44	
49		27.60		20.25	44	
50		28.10		20.25	44	
51		28.60		20.25	44	
52		29.10		20.25	44	
53		29.60		20.25	44	
54		30.10		20.25	44	
55		30.60		20.25	44	
56		31.10		20.25	44	
57		31.60		20.25	44	
58		32.10		26.25	56	
59		32.60		26.25	56	
60		33.10		26.25	56	

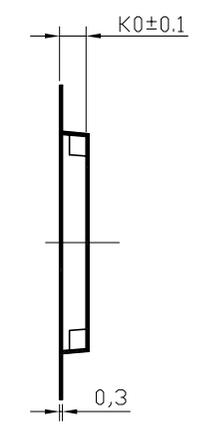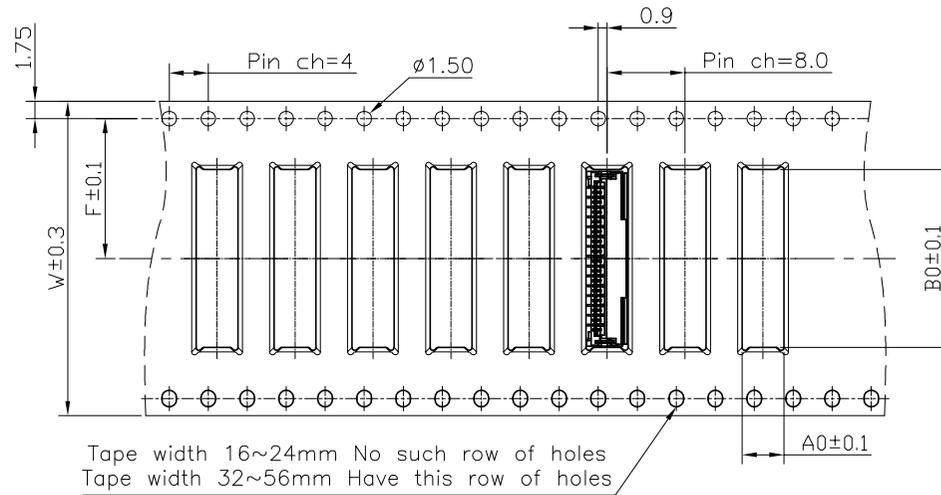


Tape width 16~24mm No such row of holes
Tape width 32~56mm Have this row of holes


User Direction of Unreeling

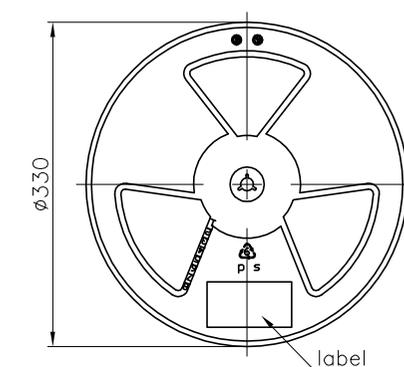


SCALE 1:10



SCALE 1:1



Tape width:
Maximum of
24mm



Tape width:
Minimum of
32mm

PART NO. SPECIFICATION: 101047-20XXX0

- Number of positions
- 1:Matte tin
 - 2:Bright tin
 - 3:Gold-plated 1u'
 - 5:Gold-plated 3u'

SER	REVISIONS	CHK	DATE	UNIT	MM
	修正EXCEL表格	张运兴	2016-03-23		

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:
X. ±0.1
X.XX ±0.05
X.XXX
ANG. ±0°30'

包装图 Packaging Figure		北极大电子科技有限公司 BEIJIDA ELECTRONICS TECHNOLOGY CO. LIMITED		
APPROVED	DATE	COMPUTER NO 101047-20XXX0		
CHECKED	DATE	NAME FPC0.5-17代掀盖式立贴成品卷装图		
DRAWN	DATE	SIZE	SCALE	REV
张运兴	2014-12-15	A4	3:4	B