
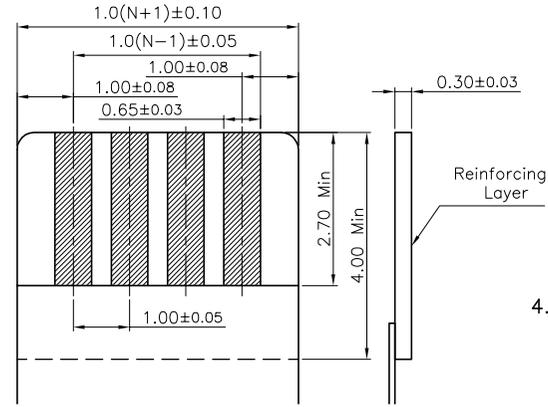
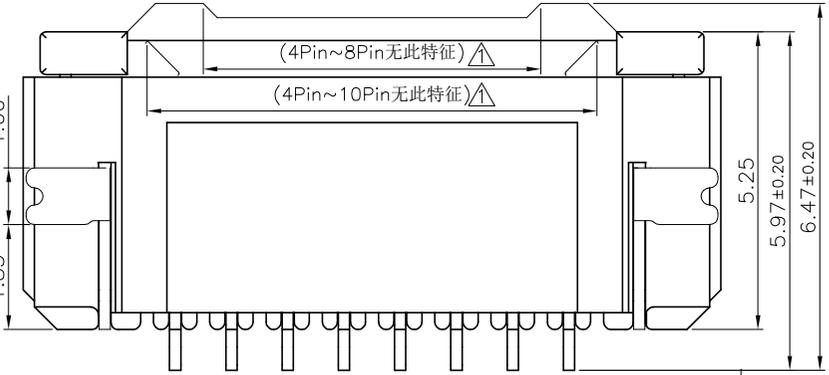
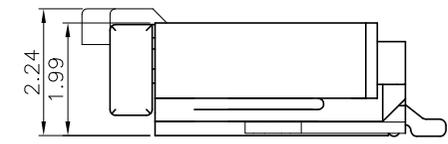


NO. of contacts (n)	Dimensions				
	A	B	C	D	E
4	8.90	8.30	5.10	3.00	8.80
5	9.90	9.30	6.10	4.00	9.80
6	10.90	10.30	7.10	5.00	10.80
7	11.90	11.30	8.10	6.00	11.80
8	12.90	12.30	9.10	7.00	12.80
9	13.90	13.30	10.10	8.00	13.80
10	14.90	14.30	11.10	9.00	14.80
11	15.90	15.30	12.10	10.00	15.80
12	16.90	16.30	13.10	11.00	16.80
13	17.90	17.30	14.10	12.00	17.80
14	18.90	18.30	15.10	13.00	18.80
15	19.90	19.30	16.10	14.00	19.80
16	20.90	20.30	17.10	15.00	20.80
17	21.90	21.30	18.10	16.00	21.80
18	22.90	22.30	19.10	17.00	22.80
19	23.90	23.30	20.10	18.00	23.80
20	24.90	24.30	21.10	19.00	24.80
21	25.90	25.30	22.10	20.00	25.80
22	26.90	26.30	23.10	21.00	26.80
23	27.90	27.30	24.10	22.00	27.80
24	28.90	28.30	25.10	23.00	28.80
25	29.90	29.30	26.10	24.00	29.80
26	30.90	30.30	27.10	25.00	30.80
27	31.90	31.30	28.10	26.00	31.80
28	32.90	32.30	29.10	27.00	32.80
29	33.90	33.30	30.10	28.00	33.80
30	34.90	34.30	31.10	29.00	34.80

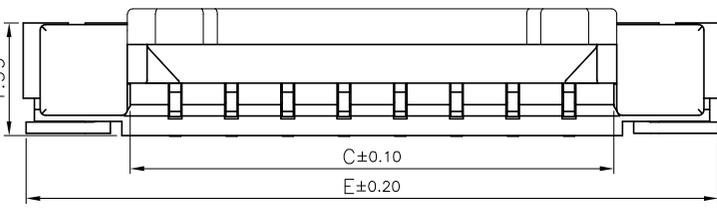


4.PART NO. SPECIFICATION:101014-X0XXX0


1:管装	PIN数	1:雾锡
2:卷装		2:亮锡
3:袋装	PIN数	3:镀金 1u'
4:其他		5:镀金 3u'
		6:半金锡

- NOTES:
- HOUSING MATERIAL: HEAT RESISTANT PLASTIC UL94 V-0.  
ACTUATOR MATERIAL: HEAT RESISTANT PLASTIC UL94 V-0.
  - TERMINAL MATERIAL: PHOSPHOR BRONZE.
    - 1.PLATED WITH BRIGHT TIN(100%) 80u"~150u"
    - 2-2.PLATED WITH MATTE TIN(100%) 80u"~150u"
    - 2-3.PLATED WITH GOLD MORE THAN 1u.
  - FITTING NAIL MATERIAL: BRASS.
    - 3-1.PLATED WITH BRIGHT TIN(100%) 80u"~150u"
    - 3-2.PLATED WITH MATTE TIN(100%) 80u"~150u"

				UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		客户图 Drawings		北极大电子科技有限公司 BEIJIDA ELECTRONICS TECHNOLOGY CO. LIMITED		
				X.		APPROVED	DATE	COMPUTER NO 101014-X0XXX0		
				X.X	±0.1	CHECKED	DATE	NAME FPC1.0-2代 H2.0掀盖式成品		
				X.XX	±0.05	陈天舒	2012-05-24	SIZE	SCALE	REV
				X.XXX		张运兴	2012-05-24	A4	8:1	B
				ANG.	±0°30'					
▲	增加备注	陈天舒	2014-05-22	UNIT	MM					
SER	REVISIONS	CHK	DATE							

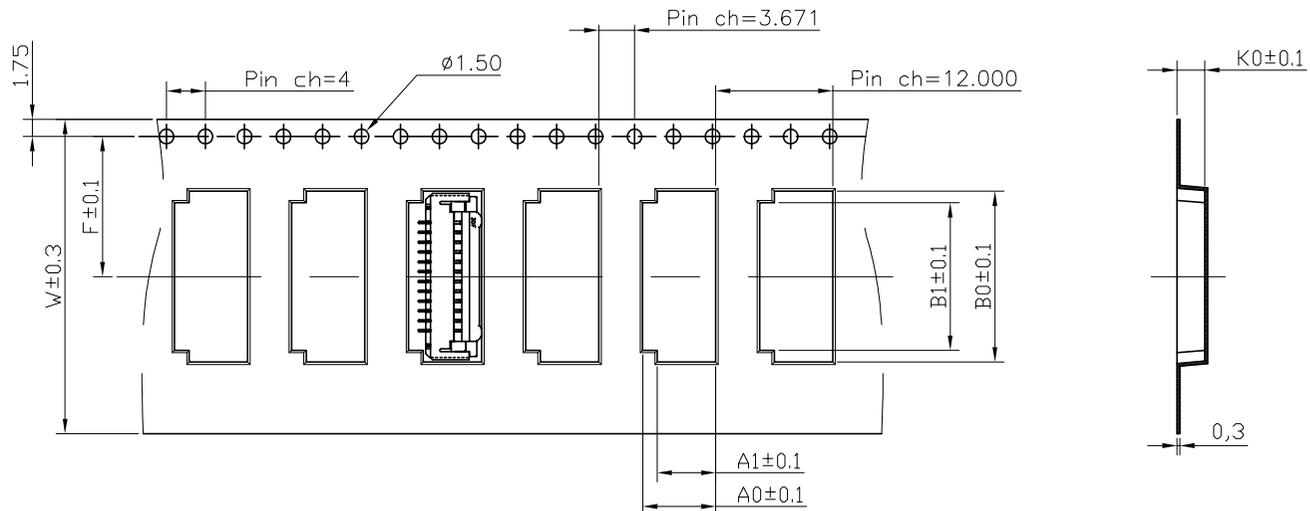

→ User Direction of Unreeling

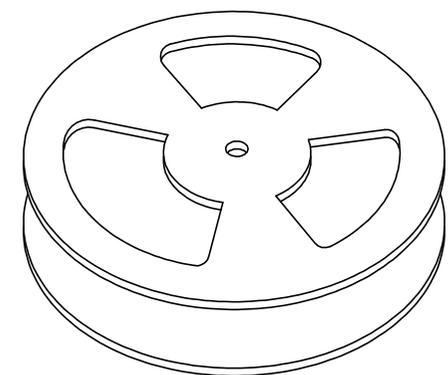

Pin数	A0	A1	B0	B1	K0	F	W	卷数量
4			9.30	6.90		6.25	16	
5			10.30	7.90		10.25	24	
6			11.30	8.90		10.25	24	
7			12.30	9.90		10.25	24	
8			13.30	10.90		10.25	24	
9			14.30	11.90		10.25	24	
10			15.30	12.90		10.25	24	
11			16.30	13.90		10.25	24	
12			17.30	14.90		10.25	24	
13			18.30	15.90		14.25	32	
14			19.30	16.90		14.25	32	
15			20.30	17.90		14.25	32	
16			21.30	18.90		20.25	44	
17	7.50	6.00	22.30	19.90	2.60	20.25	44	2000PCS /卷
18			23.30	20.90		20.25	44	
19			24.30	21.90		20.25	44	
20			25.30	22.90		20.25	44	
21			26.30	23.90		20.25	44	
22			27.30	24.90		20.25	44	
23			28.30	25.90		20.25	44	
24			29.30	26.90		20.25	44	
25			30.30	27.90		20.25	44	
26			31.30	28.90		20.25	44	
27			32.30	29.90		20.25	44	
28			33.30	30.90		20.25	44	
29			34.30	31.90		20.25	44	
30			35.30	32.90		20.25	44	

PART NO. SPECIFICATION: 101014-20XXX0

- 1:管装  
2:卷装  
3:袋装  
4:其他
- PIN数
- 1:雾锡  
2:亮锡  
3:镀金1u'  
5:镀金3u'  
6:半金锡

				UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		<b>包装图</b>		<b>北极大电子科技有限公司</b>				
						<b>Package Figure</b>		<b>BEIJIDA ELECTRONICS TECHNOLOGY CO. LIMITED</b>				
				X. ±0.1		APPROVED		DATE		COMPUTER NO		
				X.XX ±0.05		CHECKED		DATE		NAME		
				X.XXX		陈天舒		2011-10-11		FPC1.0-2代H2.0掀盖式卷装图		
				ANG. ±0°30'		DRAWN		DATE		SIZE	SCALE	REV
SER	REVISIONS	CHK	DATE	UNIT	MM	张运兴		2011-10-11		A4	3:4	A