



User Direction of Unreeling

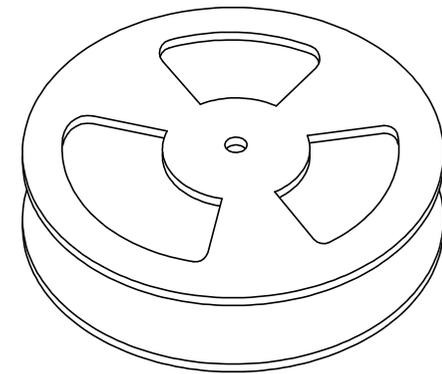

PART NO. SPECIFICATION: 10100X-20XXX0

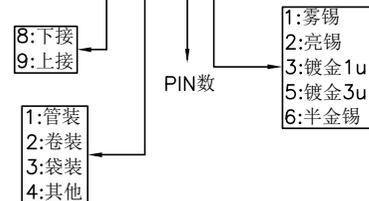

Pin数	A0	A1	B0	B1	K0	F	W	卷数量
30	8.00	6.50	22.70	16.20	3.30	14.25	32	1500PCS /卷
31			23.20	16.70		20.25	44	
32			23.70	17.20		20.25	44	
33			24.20	17.70		20.25	44	
34			24.70	18.20		20.25	44	
35			25.20	18.70		20.25	44	
36			25.70	19.20		20.25	44	
37			26.20	19.70		20.25	44	
38			26.70	20.20		20.25	44	
39			27.20	20.70		20.25	44	
40			27.70	21.20		20.25	44	
41			28.20	21.70		20.25	44	
42			28.70	22.20		20.25	44	
43			29.20	22.70		20.25	44	
44			29.70	23.20		20.25	44	
45			30.20	23.70		20.25	44	
46			30.70	24.20		20.25	44	
47			31.20	24.70		20.25	44	
48			31.70	25.20		20.25	44	
49			32.20	25.70		20.25	44	
50			32.70	26.20		20.25	44	
51			33.20	26.70		20.25	44	
52			33.70	27.20		20.25	44	
53			34.20	27.70		26.25	56	
54			34.70	28.20		26.25	56	
55			35.20	28.70		26.25	56	
56			35.70	29.20		26.25	56	
57			36.20	29.70		26.25	56	
58			36.70	30.20		26.25	56	
59			37.20	30.70		26.25	56	
60			37.70	31.20		26.25	56	

				UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		包装图		北极大电子科技有限公司		
				X. ±0.1		Packaging Figure		BEIJIDA ELECTRONICS TECHNOLOGY CO. LIMITED		
				X.XX ±0.05		APPROVED		DATE		COMPUTER NO
				X.XXX		CHECKED		DATE		10100X-20XXX0
				ANG. ±0°30'		陈天舒		2011-10-11		NAME
				DRAWN		张运兴		DATE		FPC0.5-5代H3.0拉拔式卷装图
				UNIT		DATE		SIZE		SCALE
				MM		2011-10-11		A4		3:4
				修正表格		张运兴		2016-04-20		REV
				SER REVISIONS		CHK DATE				B