

RECOMMENDED FFC/FPC DIMENSION







NOTES:

1. MATERIAL:

HOUSING: THERMOPLASTIC (UL94V-0)
 ACTUATOR: THERMOPLASTIC (UL94V-0)
 TERMINAL: PHOSPHOR BRONZE MATTE TIN PLATED
 FITTING NAIL: BRASS MATTE TIN PLATED

2. "▼" IMPORTANT DIMENSION

3. PART NO. SPECIFICATION: 101035-X0XXX0-HF

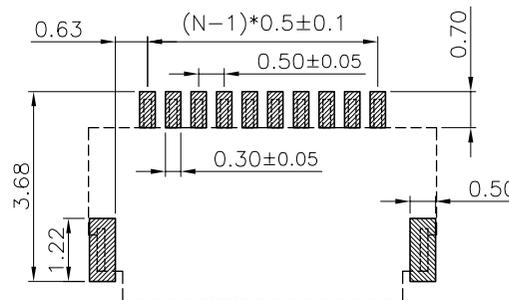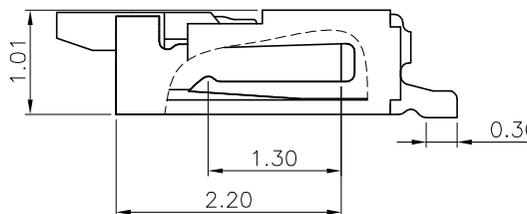


PCB LAYOUT

NO. OF PIN	DIMENSION				
	A	B	C	D	E
4	3.80	1.50	3.31	2.58	2.47
5	4.30	2.00	3.81	3.08	2.97
6	4.80	2.50	4.31	3.58	3.47
7	5.30	3.00	4.81	4.08	3.97
8	5.80	3.50	5.31	4.58	4.47
9	6.30	4.00	5.81	5.08	4.97
10	6.80	4.50	6.31	5.58	5.47
11	7.30	5.00	6.81	6.08	5.97
12	7.80	5.50	7.31	6.58	6.47
13	8.30	6.00	7.81	7.08	6.97
14	8.80	6.50	8.31	7.58	7.47
15	9.30	7.00	8.81	8.08	7.97
16	9.80	7.50	9.31	8.58	8.47
17	10.30	8.00	9.81	9.08	8.97
18	10.80	8.50	10.31	9.58	9.47
19	11.30	9.00	10.81	10.08	9.97
20	11.80	9.50	11.31	10.58	10.47
21	12.30	10.00	11.81	11.08	10.97
22	12.80	10.50	12.31	11.58	11.47
23	13.30	11.00	12.81	12.08	11.97
24	13.80	11.50	13.31	12.58	12.47
25	14.30	12.00	13.81	13.08	12.97
26	14.80	12.50	14.31	13.58	13.47
27	15.30	13.00	14.81	14.08	13.97
28	15.80	13.50	15.31	14.58	14.47
29	16.30	14.00	15.81	15.08	14.97
30	16.80	14.50	16.31	15.58	15.47

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
X.			
X.X			±0.20
X.XX			±0.10
X.XXX			
ANG.			±0°30'
△	增加无卤标识	张运兴	2015-12-07
SER	REVISIONS	CHK	DATE


客户图 Drawings		北极大电子科技有限公司 BEIJIDA ELECTRONICS TECHNOLOGY CO. LIMITED		
APPROVED	DATE	COMPUTER NO 101035-X0XXX0-HF		
CHECKED 陈天舒	DATE 2013-02-23	NAME FPC0.5-13代H1.0掀盖式成品		
DRAWN 张运兴	DATE 2013-02-23	SIZE A4	SCALE 7:1	REV B

Pin数	A0	A1	B0	B1	K0	F	W	卷数量
4			4.35	2.65		6.25	16	
5			4.85	3.15		6.25	16	
6			5.35	3.65		6.25	16	
7			5.85	4.15		6.25	16	
8			6.35	4.65		6.25	16	
9			6.85	5.15		6.25	16	
10			7.35	5.65		6.25	16	
11			7.85	6.15		6.25	16	
12			8.35	6.65		6.25	16	
13			8.85	7.15		10.25	24	
14			9.35	7.65		10.25	24	
15			9.85	8.15		10.25	24	
16			10.35	8.65		10.25	24	
17			10.85	9.15		10.25	24	
18			11.35	9.65		10.25	24	
19			11.85	10.15		10.25	24	
20			12.35	10.65		10.25	24	
21			12.85	11.15		10.25	24	
22			13.35	11.65		10.25	24	
23			13.85	12.15		10.25	24	
24			14.35	12.65		10.25	24	
25			14.85	13.15		10.25	24	
26			15.35	13.65		10.25	24	
27	4.70	3.66	15.85	14.15	1.30	10.25	24	2500PCS /卷
28			16.35	14.65		10.25	24	
29			16.85	15.15		14.25	32	
30			17.35	15.65		14.25	32	
31			17.85	16.15		14.25	32	
32			18.35	16.65		14.25	32	
33			18.85	17.15		14.25	32	
34			19.35	17.65		14.25	32	
35			19.85	18.15		14.25	32	
36			20.35	18.65		20.25	44	
37			20.85	19.15		20.25	44	
38			21.35	19.65		20.25	44	
39			21.85	20.15		20.25	44	
40			22.35	20.65		20.25	44	
41			22.85	21.15		20.25	44	
42			23.35	21.65		20.25	44	
43			23.85	22.15		20.25	44	
44			24.35	22.65		20.25	44	
45			24.85	23.15		20.25	44	
46			25.35	23.65		20.25	44	
47			25.85	24.15		20.25	44	
48			26.35	24.65		20.25	44	
49			26.85	25.15		20.25	44	
50			27.35	25.65		20.25	44	

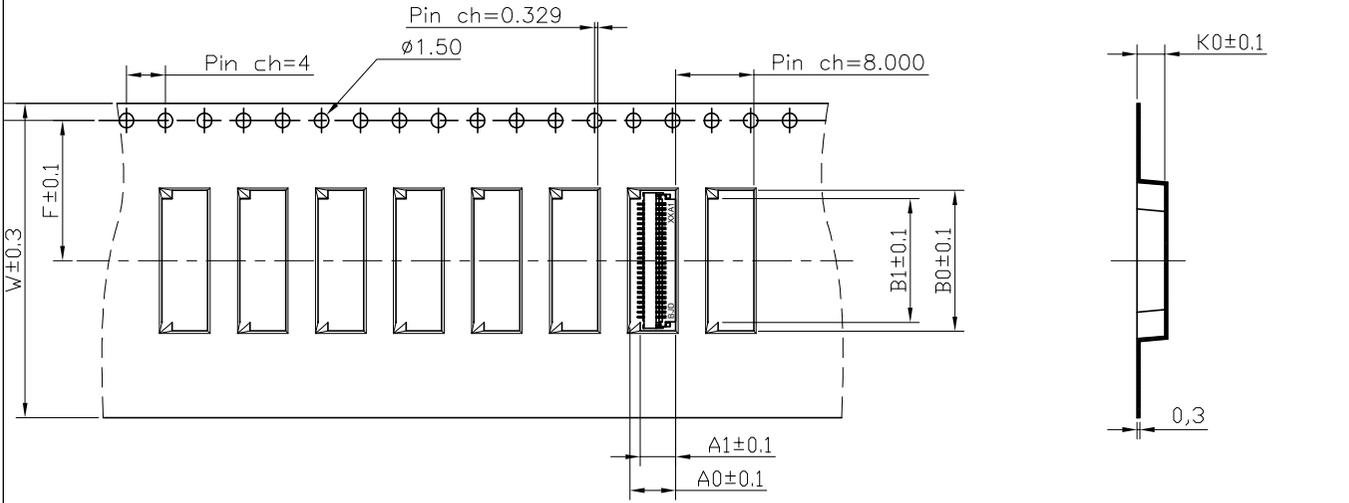

→ User Direction of Unreeling

PART NO. SPECIFICATION: 101035-20XXX0

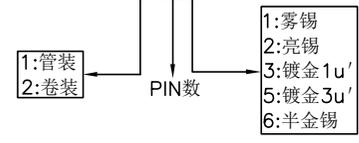

				UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		包装图 Packaging Figure		北极大电子科技有限公司 BEIJIDA ELECTRONICS TECHNOLOGY CO. LIMITED				
				X. X.X ±0.1 X.XX ±0.05 X.XXX ANG. ±0°30'		APPROVED		DATE		COMPUTER NO		
						CHECKED		DATE		NAME		
						陈天舒		2013-09-12		FPC0.5-13代H1.0掀盖式卷装图		
				UNIT		DRAWN		DATE		SIZE	SCALE	REV
SER	REVISIONS	CHK	DATE	MM		张运兴		2013-09-12		A4	3:4	A